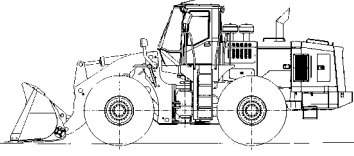


## BUCKET DATA

			Standard Boom						
			General Purpose		Rock Straight		Rock-V-Edge		Light Material
			Straight Edge With Bolt-on Cutting Edge	Straight Edge With Teeth	Straight Edge Without Teeth	Straight Edge With Teeth	Spade Nose Edge Without Teeth	Spade Nose With Teeth	Straight Edge With Bolt-on Cutting Edge
Capacity	Heaped	yd <sup>3</sup> (m <sup>3</sup> )	7.0 (5.4)	6.6 (5.0)	5.5 (4.2)	5.5 (4.2)	5.5 (4.2)	5.5 (4.2)	7.7 (5.9)
	Struck	yd <sup>3</sup> (m <sup>3</sup> )	5.8 (4.4)	5.5 (4.2)	4.7 (3.6)	4.7 (3.6)	4.7 (3.6)	4.7 (3.6)	6.7 (5.1)
Maximum dumping clearance		ft-in (mm)	10'6 <sup>3</sup> / <sub>4</sub> " (3220)	10'2'1/4" (3105)	10'10 <sup>5</sup> / <sub>8</sub> " (3320)	10'2" (3100)	10'4 <sup>5</sup> / <sub>8</sub> " (3165)	9'8 <sup>7</sup> / <sub>8</sub> " (2970)	10'3'1/16" (3125)
Dumping reach (to front of bucket edge or tooth)		ft-in (mm)	4'5 <sup>7</sup> / <sub>8</sub> " (1350)	4'7 <sup>7</sup> / <sub>8</sub> " (1420)	4'3" (1295)	4'8 <sup>1</sup> / <sub>8</sub> " (1425)	4'9 <sup>1</sup> / <sub>8</sub> " (1450)	5'1" (1550)	4'8 <sup>7</sup> / <sub>8</sub> " (1445)
Bucket hinge pin height		ft-in (mm)	14'8 <sup>3</sup> / <sub>8</sub> " (4490)	14'8 <sup>3</sup> / <sub>8</sub> " (4490)	14'8 <sup>3</sup> / <sub>8</sub> " (4490)	14'8 <sup>3</sup> / <sub>8</sub> " (4490)	14'8 <sup>3</sup> / <sub>8</sub> " (4490)	14'8 <sup>3</sup> / <sub>8</sub> " (4490)	14'8 <sup>3</sup> / <sub>8</sub> " (4490)
Digging depth		ft-in (mm)	3 <sup>9</sup> / <sub>16</sub> " (90)	4 <sup>5</sup> / <sub>16</sub> " (110)	1 <sup>15</sup> / <sub>16</sub> " (50)	4 <sup>5</sup> / <sub>16</sub> " (110)	1 <sup>15</sup> / <sub>16</sub> " (50)	4 <sup>3</sup> / <sub>4</sub> " (120)	3 <sup>9</sup> / <sub>16</sub> " (90)
Breakout force		lb (kg)	55,125 (25,000)	59,500 (27,000)	59,500 (27,000)	59,500 (27,000)	50,700 (23,000)	50,700 (23,000)	50,100 (22,700)
Bucket tilt-back angle	at ground level		43°	43°	43°	43°	43°	43°	43°
	at carry position		51°	51°	51°	51°	51°	51°	51°
Overall	Length	ft-in (mm)	30'5 <sup>3</sup> / <sub>8</sub> " (9280)	30'10 <sup>7</sup> / <sub>8</sub> " (9420)	30'1 <sup>7</sup> / <sub>16</sub> " (9180)	30'10 <sup>7</sup> / <sub>8</sub> " (9420)	30'10 <sup>1</sup> / <sub>16</sub> " (9400)	31'5 <sup>15</sup> / <sub>16</sub> " (9600)	30'10 <sup>1</sup> / <sub>2</sub> " (9410)
	Height	ft-in (mm)	12'4 <sup>1</sup> / <sub>16</sub> " (3760)	12'4 <sup>1</sup> / <sub>16</sub> " (3760)	12'4 <sup>1</sup> / <sub>16</sub> " (3760)	12'4 <sup>1</sup> / <sub>16</sub> " (3760)	12'4 <sup>1</sup> / <sub>16</sub> " (3760)	12'4 <sup>1</sup> / <sub>16</sub> " (3760)	12'4 <sup>1</sup> / <sub>16</sub> " (3760)
	Width (outside tire)	ft-in (mm)	10'6 <sup>3</sup> / <sub>4</sub> " (3220)	10'6 <sup>3</sup> / <sub>4</sub> " (3220)	10'6 <sup>3</sup> / <sub>4</sub> " (3220)	10'6 <sup>3</sup> / <sub>4</sub> " (3220)	10'6 <sup>3</sup> / <sub>4</sub> " (3220)	10'6 <sup>3</sup> / <sub>4</sub> " (3220)	10'6 <sup>3</sup> / <sub>4</sub> " (3220)
	Width (outside bucket)	ft-in (mm)	11'3 <sup>7</sup> / <sub>8</sub> " (3450)	11'4 <sup>1</sup> / <sub>2</sub> " (3465)	11'3 <sup>7</sup> / <sub>8</sub> " (3450)	11'4 <sup>1</sup> / <sub>2</sub> " (3465)	11'3 <sup>7</sup> / <sub>8</sub> " (3450)	11'4 <sup>1</sup> / <sub>2</sub> " (3465)	11'3 <sup>7</sup> / <sub>8</sub> " (3450)
Wheel base		ft-in (mm)	11'8 <sup>1</sup> / <sub>8</sub> " (3560)	11'8 <sup>1</sup> / <sub>8</sub> " (3560)	11'8 <sup>1</sup> / <sub>8</sub> " (3560)	11'8 <sup>1</sup> / <sub>8</sub> " (3560)	11'8 <sup>1</sup> / <sub>8</sub> " (3560)	11'8 <sup>1</sup> / <sub>8</sub> " (3560)	11'8 <sup>1</sup> / <sub>8</sub> " (3560)
Minimum turning radius	at outside bucket	ft-in (mm)	23'10 <sup>1</sup> / <sub>2</sub> " (7275)	24'1/4" (7320)	23'9 <sup>1</sup> / <sub>16</sub> " (7240)	24'1/4" (7320)	23'9 <sup>1</sup> / <sub>16</sub> " (7240)	24'1/4" (7320)	24'3/8" (7325)
	at center of outside tire	ft-in (mm)	20'7 <sup>1</sup> / <sub>16</sub> " (6110)	20'7 <sup>1</sup> / <sub>16</sub> " (6110)	20'7 <sup>1</sup> / <sub>16</sub> " (6110)	20'7 <sup>1</sup> / <sub>16</sub> " (6110)	20'7 <sup>1</sup> / <sub>16</sub> " (6110)	20'7 <sup>1</sup> / <sub>16</sub> " (6110)	20'7 <sup>1</sup> / <sub>16</sub> " (6110)
Minimum ground clearance		ft-in (mm)	1'7 <sup>5</sup> / <sub>8</sub> " (500)	1'7 <sup>5</sup> / <sub>8</sub> " (500)	1'7 <sup>5</sup> / <sub>8</sub> " (500)	1'7 <sup>5</sup> / <sub>8</sub> " (500)	1'7 <sup>5</sup> / <sub>8</sub> " (500)	1'7 <sup>5</sup> / <sub>8</sub> " (500)	1'7 <sup>5</sup> / <sub>8</sub> " (500)
Full articulation angle		degree	40°	40°	40°	40°	40°	40°	40°
Operating weight (with ROPS Cabin)		lb (kg)	66,330 (30,080)	65,950 (29,910)	64,230 (29,130)	64,800 (29,390)	64,520 (29,260)	65,090 (29,520)	66,520 (30,170)
Static Tipping Load (with ROPS Cabin)	Straight	lb (kg)	51,710 (23,450)	52,080 (23,620)	53,690 (24,350)	53,140 (24,100)	53,380 (24,210)	52,830 (23,960)	51,490 (23,350)
	Full turn	lb (kg)	42,470 (19,260)	42,780 (19,400)	44,100 (20,000)	43,640 (19,790)	43,840 (19,980)	43,390 (19,680)	42,270 (19,170)

The weight and load figure includes optional counterweight, Enclosed ROPS Cab. 29.5x25-22PR (L-3) tires. Full fuel tank and operator.

Materials and specifications are subject to change without notice and without obligation on the part of the manufacturer. The specifications supplied, while believed to be completely reliable, are not to be taken as warranty for which we assume legal responsibility.